


CELTO ACOUSTIQUE IWAC210 G2 2-way Line Array Module

Line array with integrated rigging system



- Milli Kai

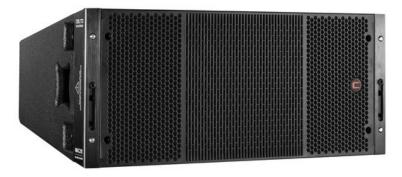





List price: on demand €

incl. 19% VAT.

Features:

- Real 700 W + 110 W RMS power capacity
- For audiences with up to 30,000 persons
- Up to 16 speakers per array with 10 times safety standard
- Premium custom made drivers
- Aquaplased TC4 diaphragm for ultra smooth HF reproduction
- Proprietary isophase wave-shaping acoustic lens
- Touring-grade textured coating finish
- With QuickFly system
- Wheelboard optional
- Built with NEUTRIK connector
- CELTO ACOUSTIQUE driver
- For application areas such as: Theater; concerts/FoH's; sports centres/gyms; stage; rental **Package contents**
- 1 x top

Technical specifications:

Frequency range:	50 - 18000 Hz in full-range mode
	Rated: 110W RMS HF
	Program: 220W HF
	Peak: 440W HF
	Rated: 700W RMS LF
	Program: 1400W LF
Power:	Peak: 2800W LF

Logistic

EAN / GTIN: 4026397668230 Weight: 34,00 kg Length: 0.60 m Width: 0.42 m Heigth: 0.80 m Bulky product

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

n (F) P processor
P10003301
subwoofer
lymium
with
veeter highs 3" n with wave
nade with
- -